



# STC AM488-PFA HIGH TEMPERATURE SEALING PLUGS

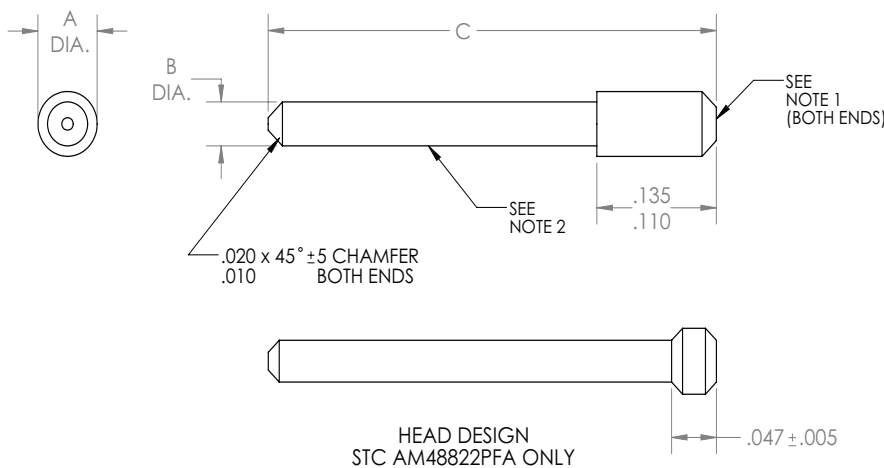

## NOTE:

1. Molding marks, protusions and blemishes from gate cutoffs are permissible but only on the plug ends or side of the head and shall not be greater than 0.005 inch in height.
2. The item shall be free from flash and burrs. The length of diameter B shall be free of all molding marks, protusions and blemishes.
3. PFA OPERATING TEMPERATURE RANGE FROM -65 C TO 260 C".

PART #	COLOR	A DIA	B DIA	C DIM	GROMMET CAVITY SIZE	MS27488	
						DASH	REV
STC AM48822PFA	BLACK	.066 .058	.045 .035	.500 .438	23-32	-22	L
STC AM48820PFA	RED	.100 .085	.065 .045	.584 .544	20	-20	L
STC AM48816PFA	BLUE	.138 .128	.093 .073	.584 .544	16	-16	L
STC AM48812PFA	YELLOW	.176 .166	.131 .111	.584 .544	12	-12	L



***Step'n Components***

17832 Gothard Street | Huntington Beach, CA 92647 | Phone: 714-362-3713  
Fax: 714-362-3714 | Email: sales@stepnco.com | www.stepnco.com