



# STC AM488-PFA HIGH TEMPERATURE SEALING PLUGS

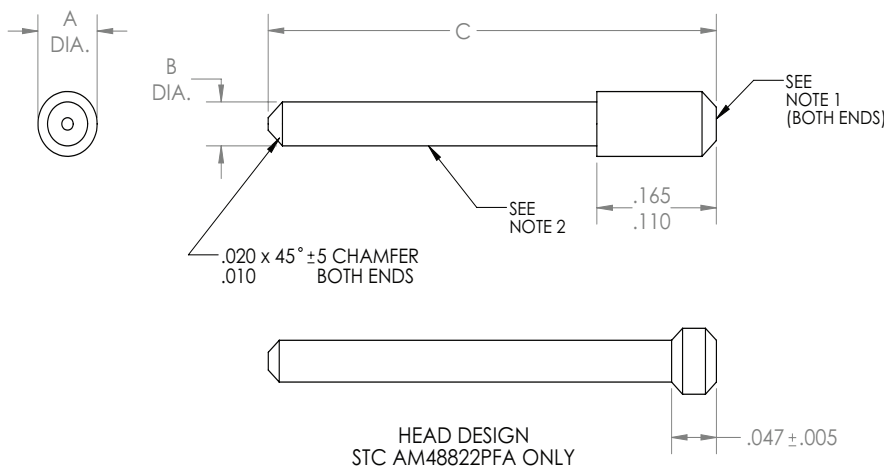

## NOTE:

1. Molding marks, protusions and blemishes from gate cutoffs are permissible but only on the plug ends or side of the head and shall not be greater than 0.005 inch in height.
2. The item shall be free from flash and burrs. The length of diameter B shall be free of all molding marks, protusions and blemishes.
3. PFA OPERATING TEMPERATURE RANGE FROM -65 C TO 260 C".

| PART #         | COLOR  | A<br>DIA     | B<br>DIA     | C<br>DIM     | GROMMET<br>CAVITY SIZE | MS27488 |     |
|----------------|--------|--------------|--------------|--------------|------------------------|---------|-----|
|                |        |              |              |              |                        | DASH    | REV |
| STC AM48822PFA | BLACK  | .066<br>.058 | .045<br>.035 | .500<br>.438 | 23-32                  | -22     | L   |
| STC AM48820PFA | RED    | .100<br>.085 | .065<br>.045 | .584<br>.544 | 20                     | -20     | L   |
| STC AM48816PFA | BLUE   | .138<br>.128 | .093<br>.073 | .584<br>.544 | 16                     | -16     | L   |
| STC AM48812PFA | YELLOW | .176<br>.166 | .131<br>.111 | .584<br>.544 | 12                     | -12     | L   |



***Step'n Components***

17832 Gothard Street | Huntington Beach, CA 92647 | Phone: 714-362-3713  
Fax: 714-362-3714 | Email: sales@stepnco.com | www.stepnco.com